

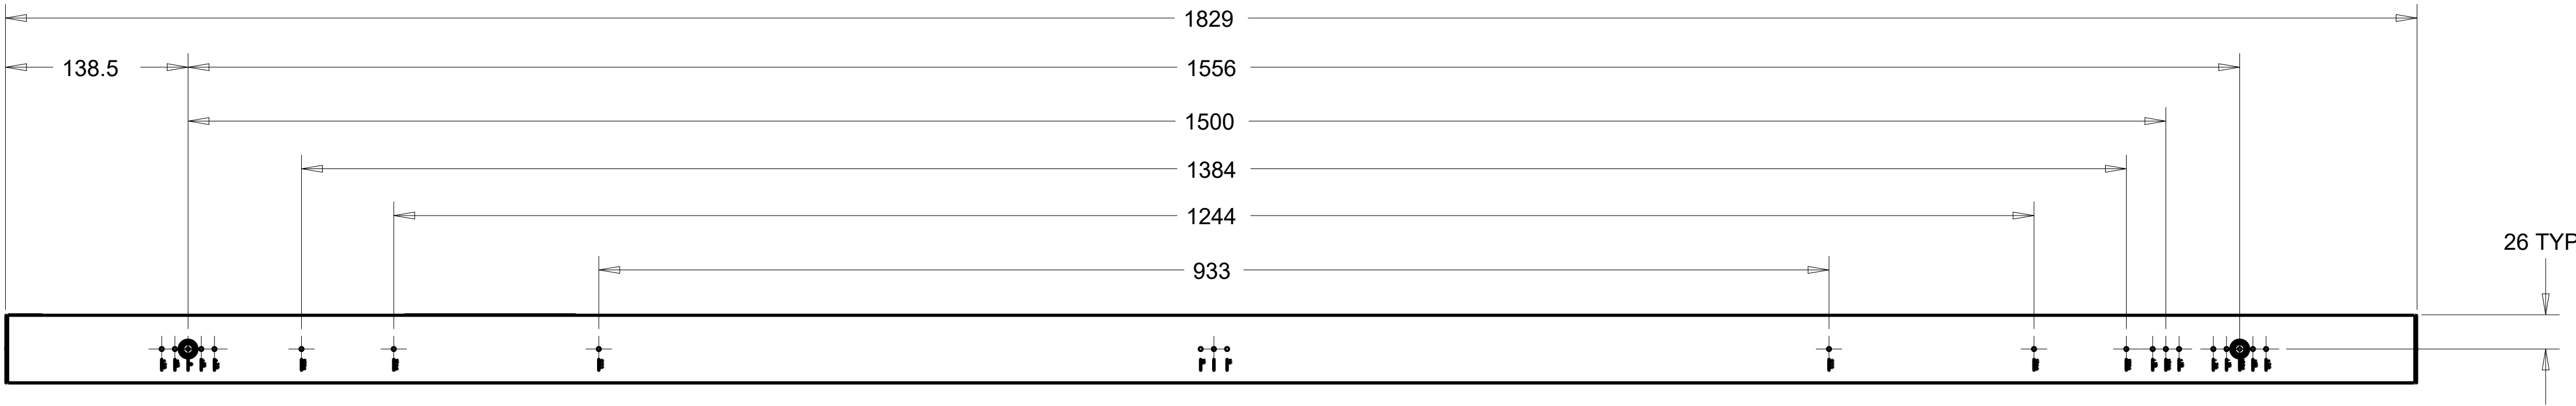
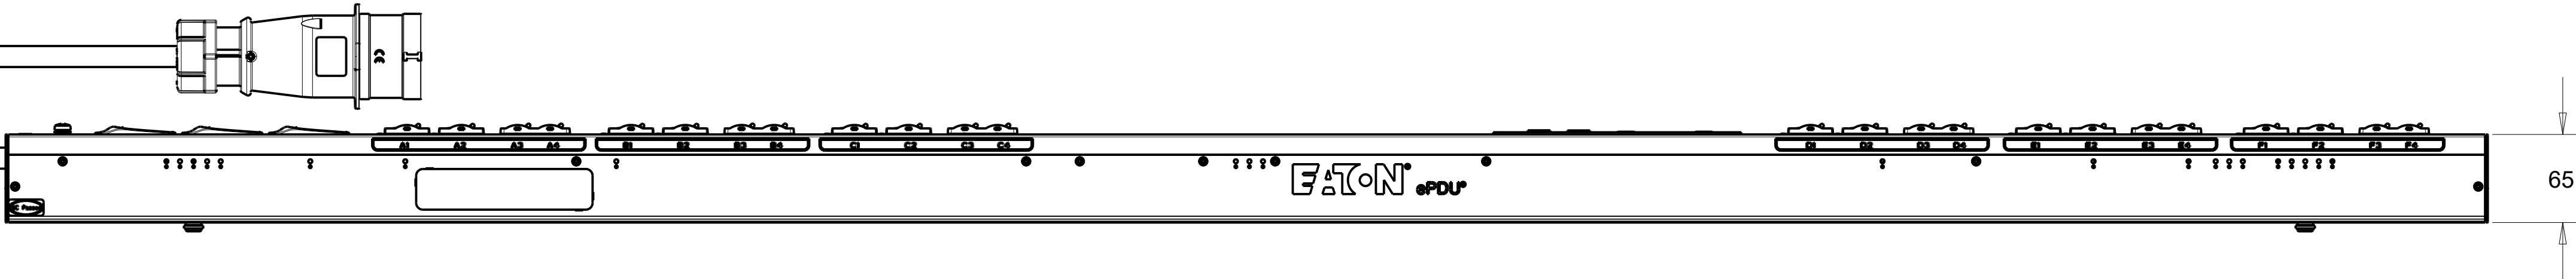


8

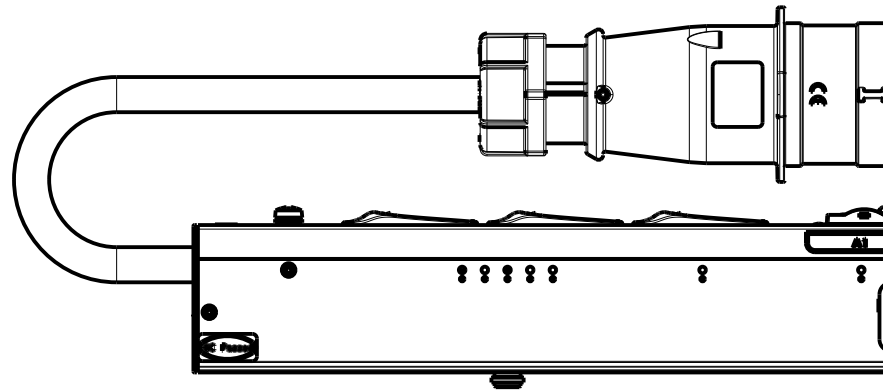


7

6

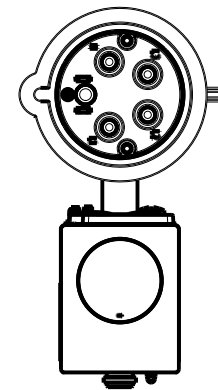


CABLE LENGTH SHOWN NOT TO SCALE

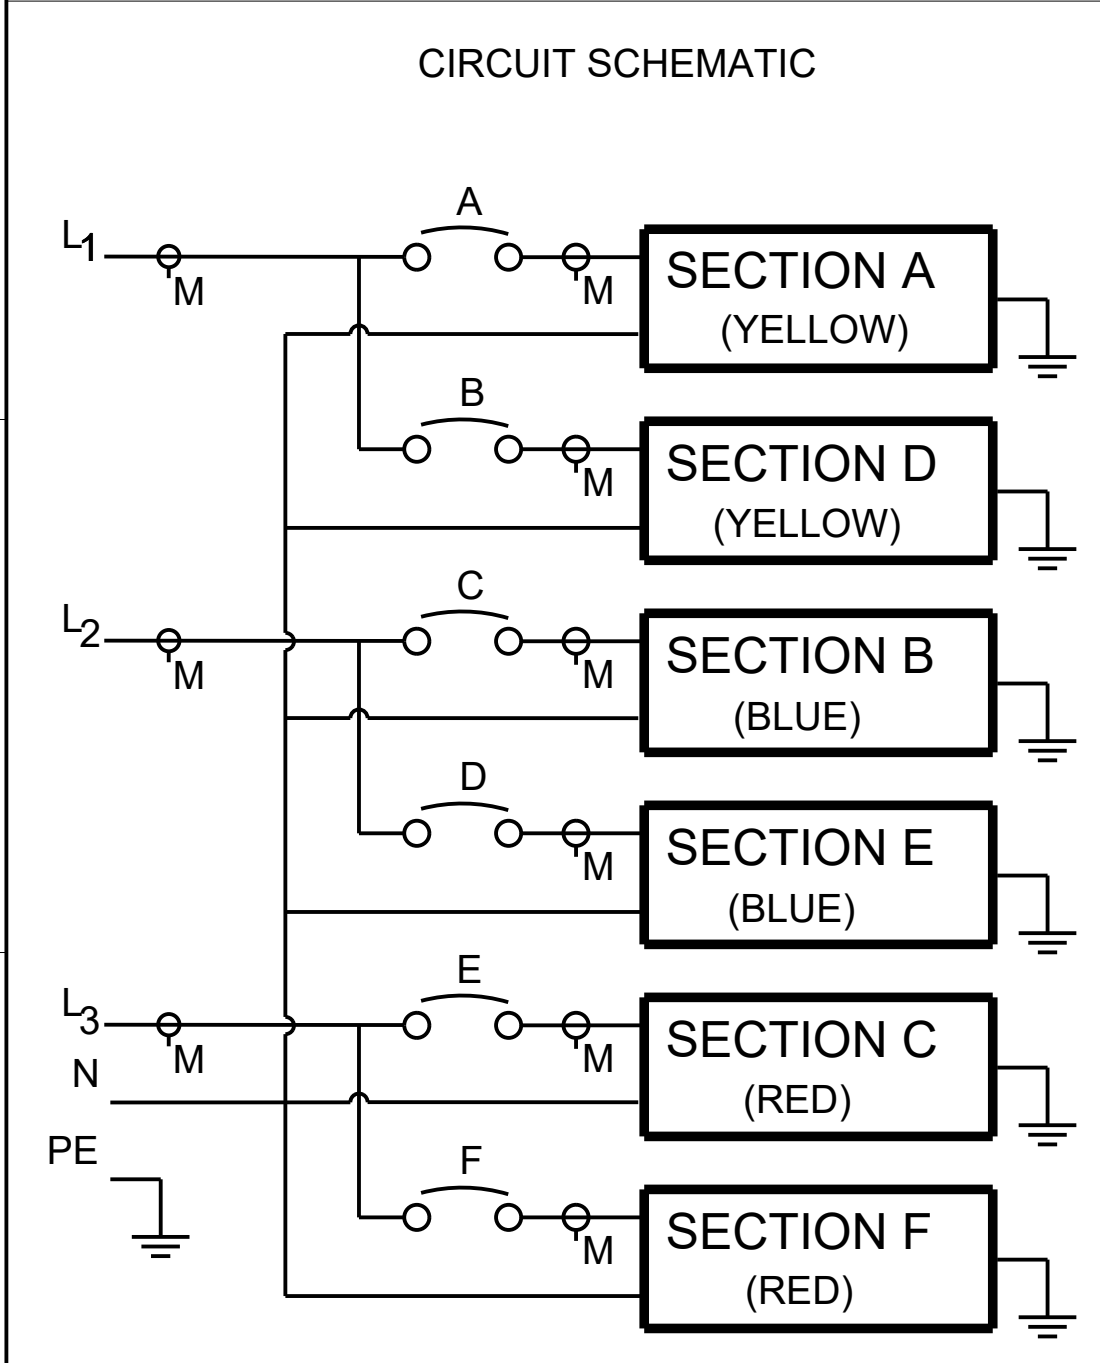

3

EMAB12		G3 MANAGED	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT, BRANCH AND OUTLETS. INDIVIDUAL OUTLET CONTROL	IEC 60309-2 32A 400V~ WYE, 3W+N+PE 4.0MM HO7 POWER CORD CABLE LENGTH: 3.0M	(12) IEC 60320 C13 GRIP (12) IEC 60320 C19 GRIP ALTERNATING SECTIONS	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1829MM WIDTH: 52 MM DEPTH: 65MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	3Ø;346-415V~; WYE, 3W+N+PE 50/60HZ 32A	200-240V~;50/60HZ 10A PER C13;16A PER C19 16A MAX PER SECTION 32A MAX PER PHASE	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
(6) 16A 1-POLE	NONE	STANDARD KSP025 - EPDU G3 EMEA VERT INSTALL NETWORK PACK KA35 OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMA6DH8FBJF8BCM

1

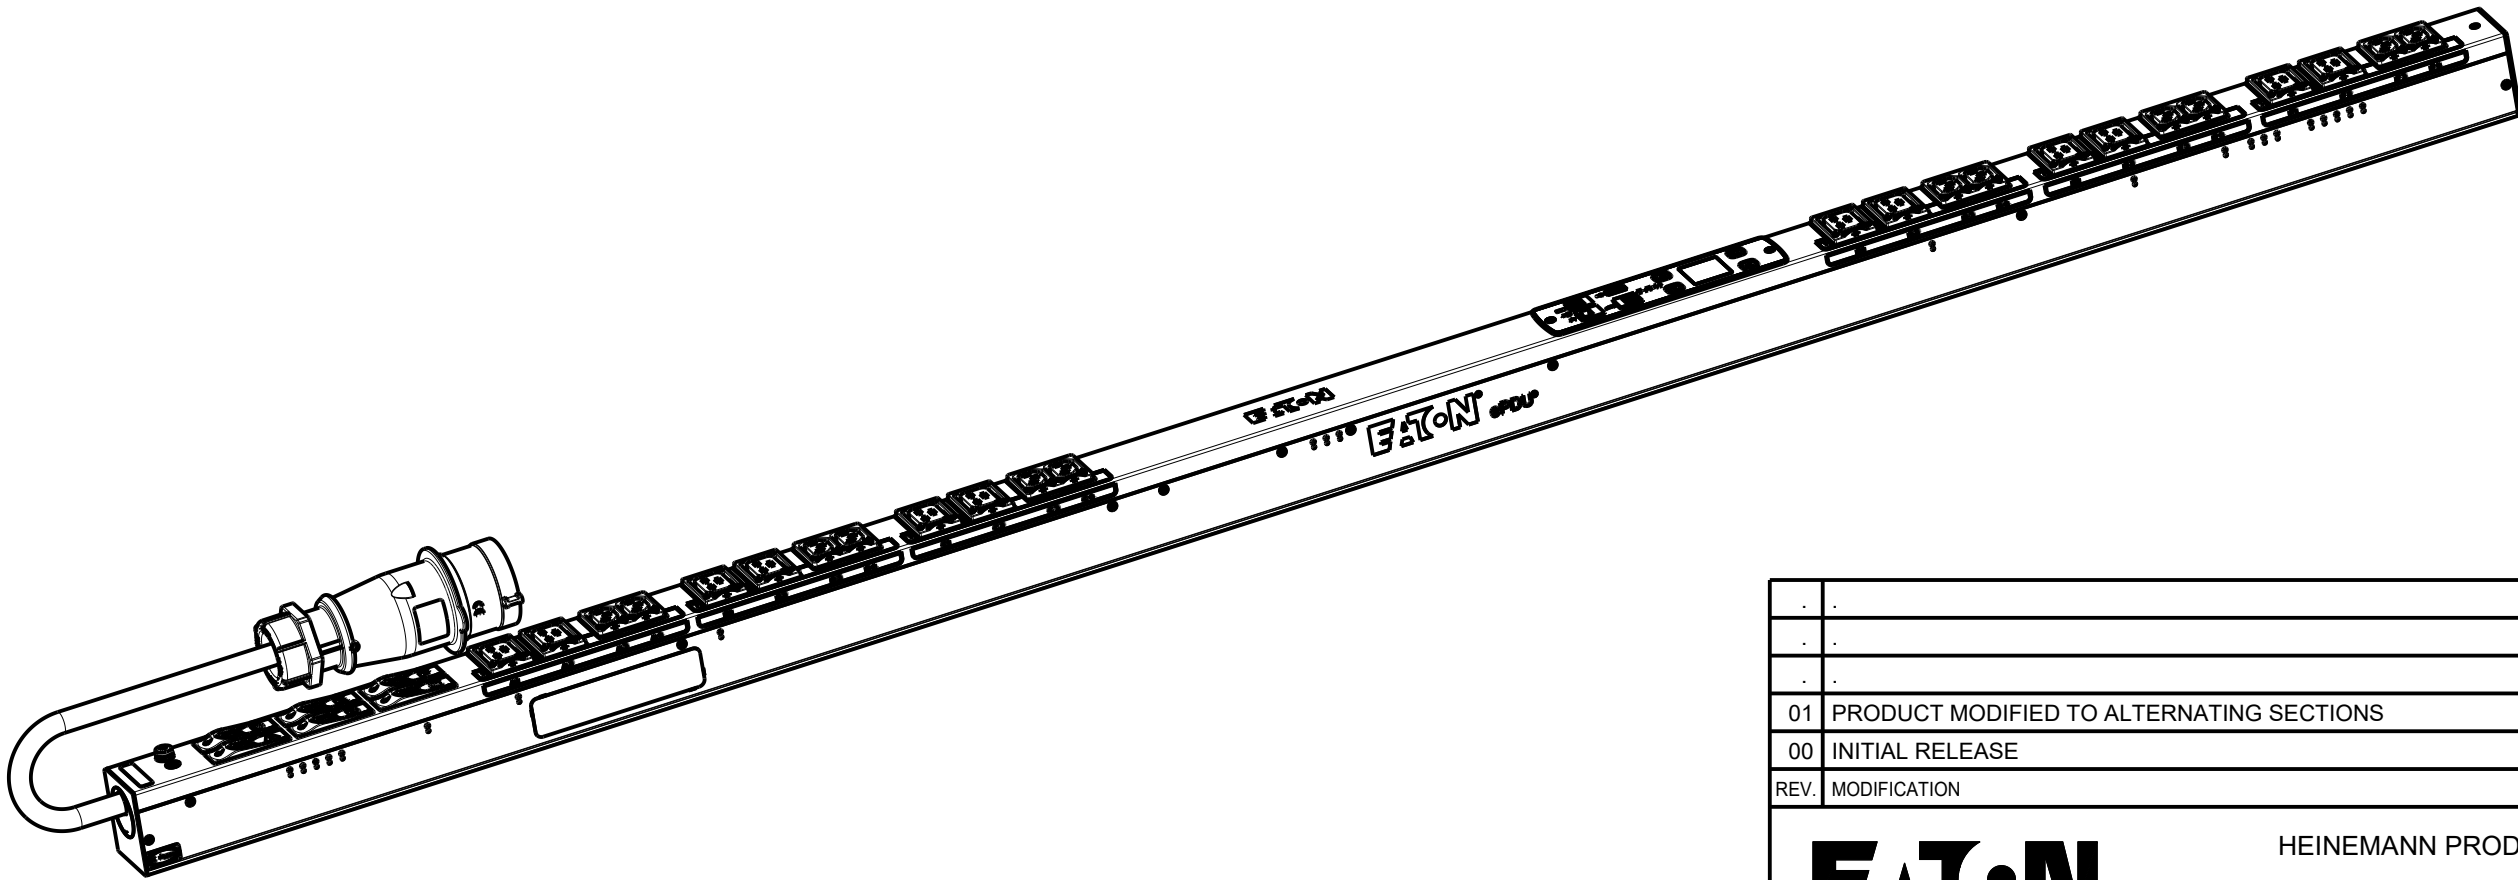

PICTORIAL VIEW
REFERENCE ONLY
SCALE 0.188

01	PRODUCT MODIFIED TO ALTERNATING SECTIONS	02.04.2019	AEK	MB
00	INITIAL RELEASE	09.11.2016	RA	M.B
REV.	MODIFICATION	DATE	DESSINER	VERIF
EATON		HEINEMANN PRODUCTS		VUE/VUE EUROPE
CH-1345 LE LIEU SWITZERLAND		3/10		N° MAG EMAB12
TRAITEMENT / FINISH NA		DESSINE LE / DRAWED THE		09.11.2016
MATERIE / MATERIAL NA		PAR / BY		RA
TOLERANCE GENERALE / GENERAL TOLERANCE		VERIFIE PAR / VERIFIED BY		M.B
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT		X		DIMENSIONS AND TOLERANCES IN MILLIMETERS
DESIGNATION		EPDU MA 0U (309 32A 3P)12XC13:12XC19		SK-90919-Y1
COTES A CONTROLER INSPECTION DIMENSIONS		COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS		# XX.XX
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.		NUMERO DU PLAN PLAN NUMBER		01
REV.				